



**VEGANTA**  
C E R A M I C



SEIZE  
THE WALL

# Frag- rance

**Glossy**  
COLLECTION

**WALL TILES**

12X18

**WALL TILES**  
300x450mm

Glossy



## Vision & Mission

- Being the best by providing outstanding quality of product and customer support.
- Continue expanding operations to reach every corner of the world.
- Provide better quality Digital Wall Tiles at affordable price
- Improving lifestyles of our customers by providing innovative products & services
- Bring the inspirational and innovating design for home & office wall space

# technology

## WALL TILES

300x450mm

Glossy



HIGH  
DEFINITION  
PRINTING



DIGITAL  
PRINTING  
TECHNOLOGY




QUALITY  
ASSURED  
COMPANY




AN  
ISO 9001:2015  
COMPANY





**VEGANTA**  
C E R A M I C



**WHITE**



**BLACK**

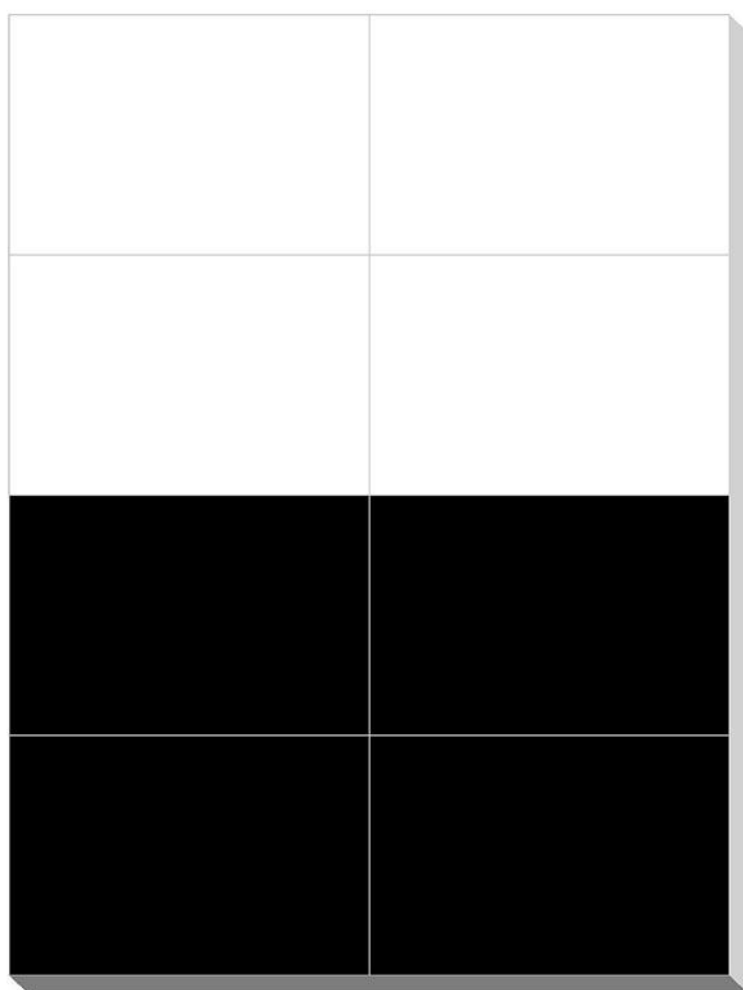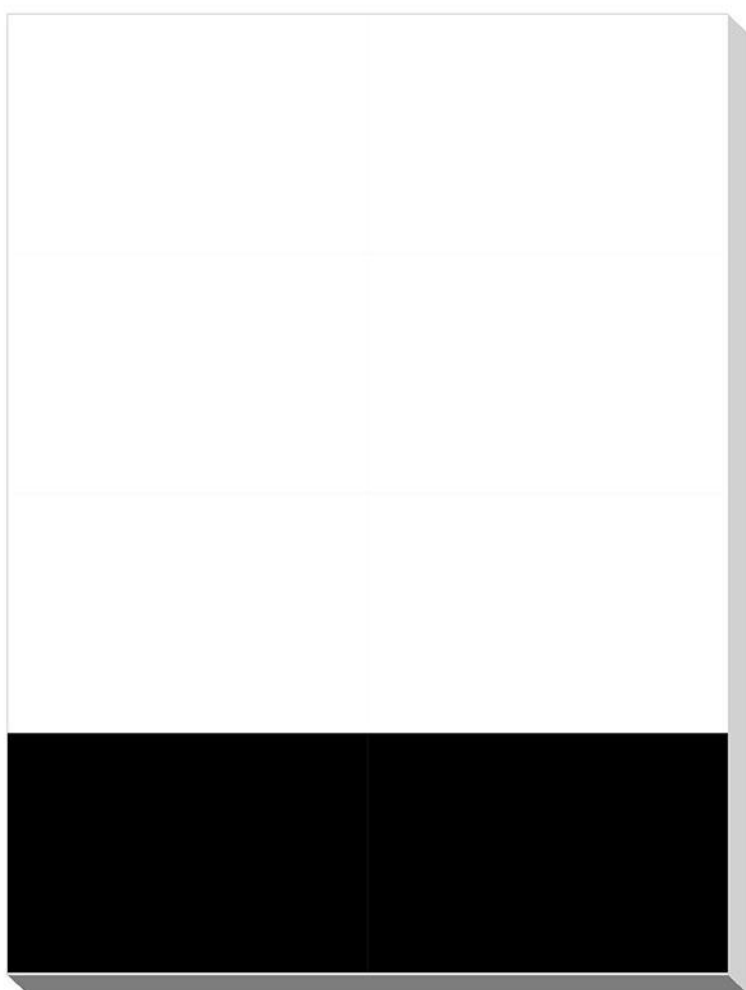

**WALL TILES**


300x450mm

Glossy







**VEGANTA**  
C E R A M I C

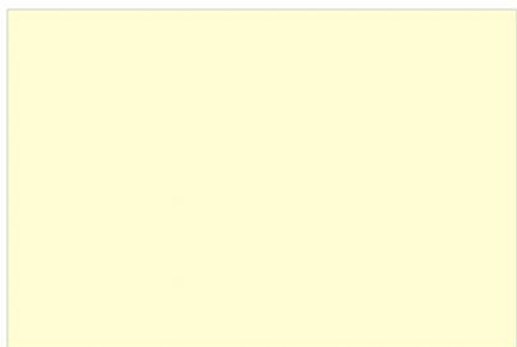

**IVORY**



**BLUE**

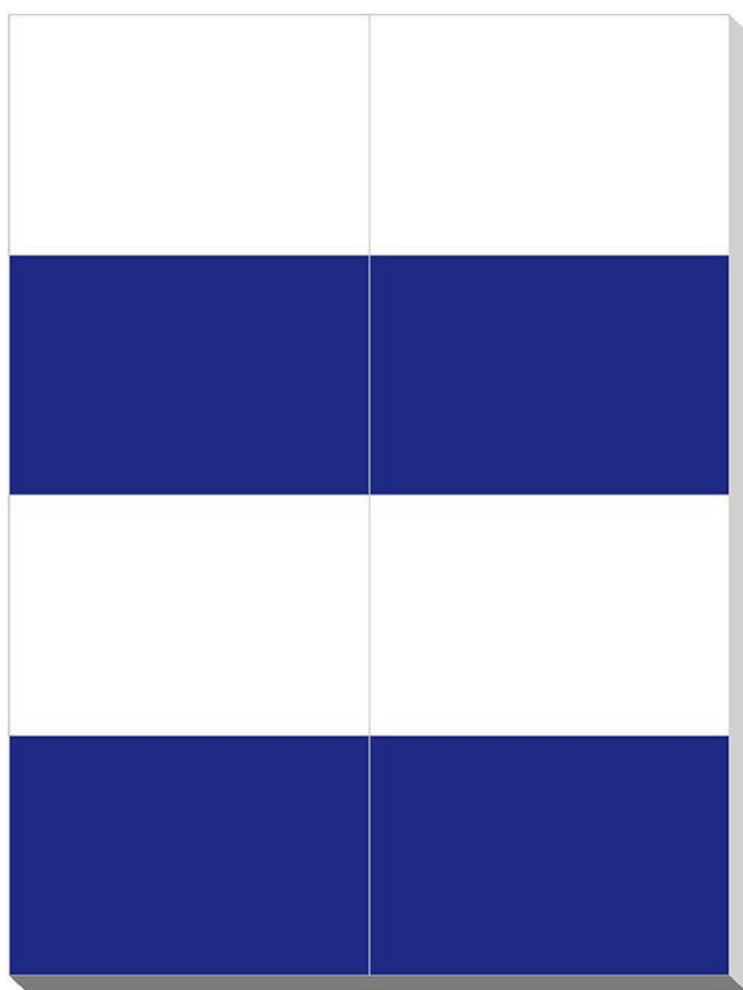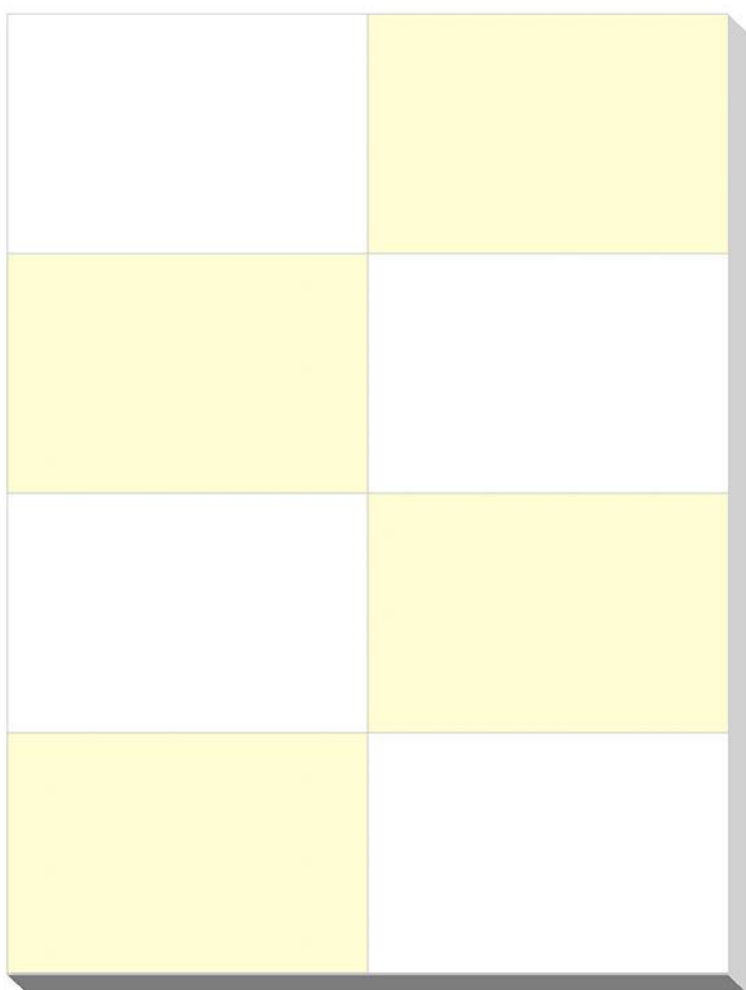

**WALL TILES**

300x450mm

Glossy








**VEGANTA**  
C E R A M I C



**RED**

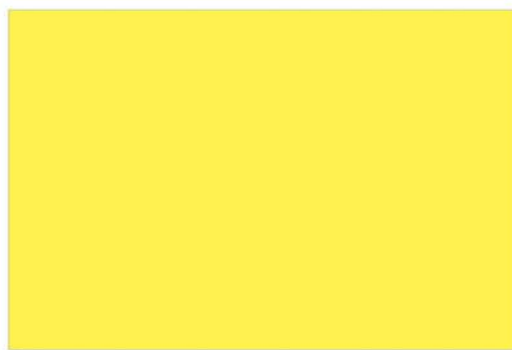

**YELLOW**

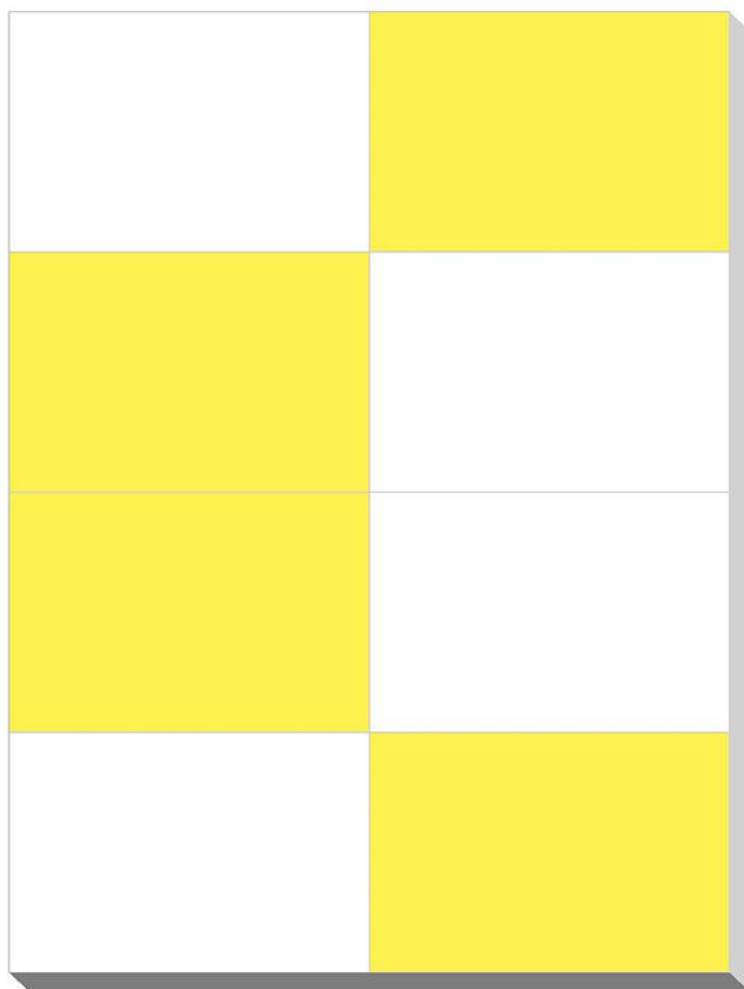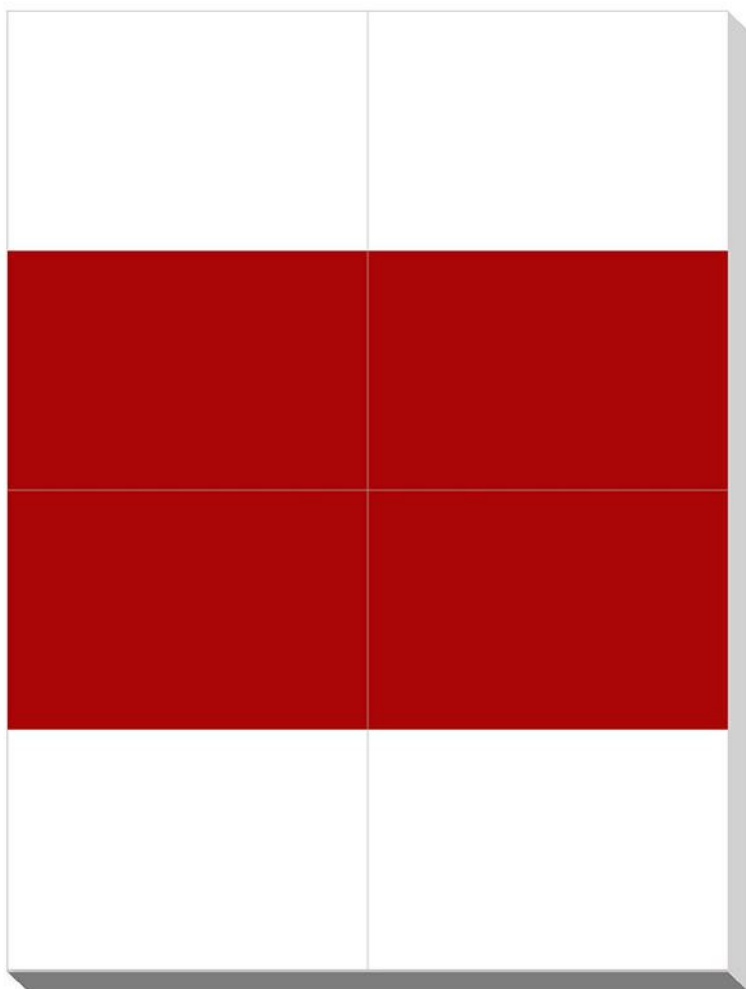

**WALL TILES**

300x450mm

Glossy







**VEGANTA**  
C E R A M I C



**GREEN**



**ORANGE**

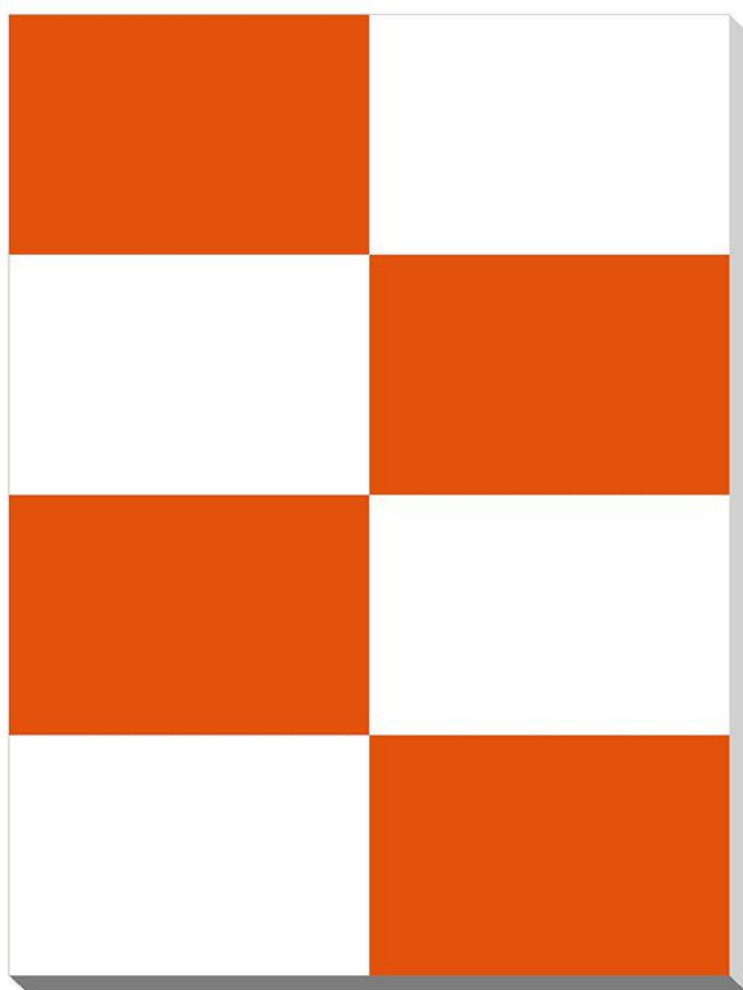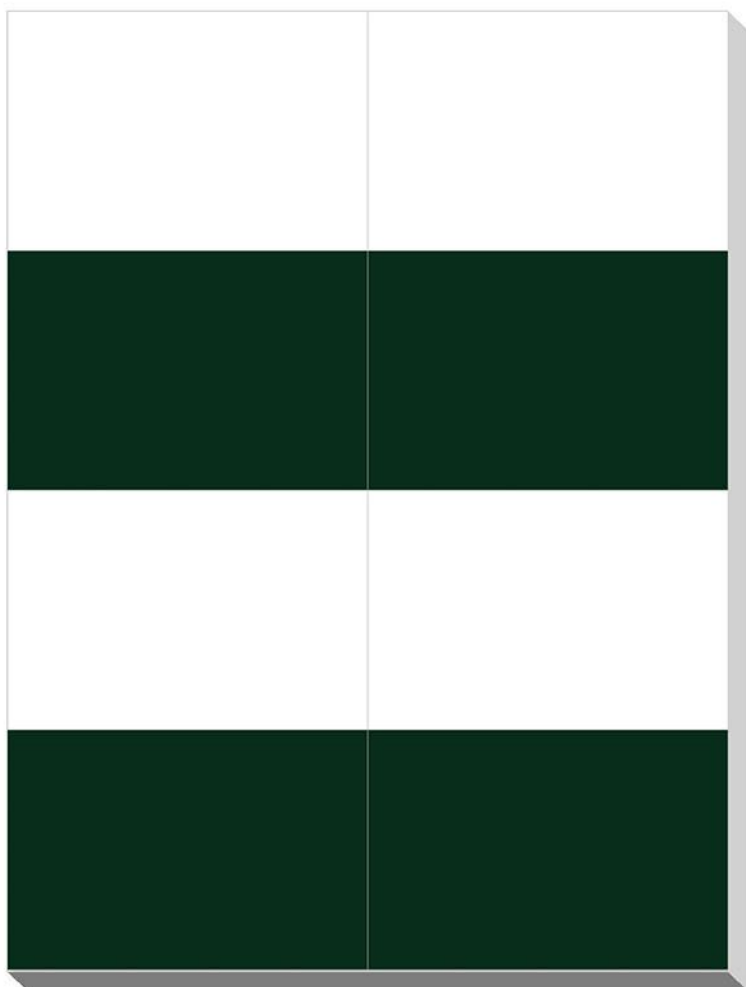

**WALL TILES**

300x450mm

Glossy





## Technical Specification

| CHARACTERISTICS                | REQUIRMENT AS PER ISO-13006/EN14411 GROUP BIa | OUR VALUE     | ISO / EN TESTING METHOD |
|--------------------------------|-----------------------------------------------|---------------|-------------------------|
| DIMENSION AND SURFACE QUALITY  |                                               |               |                         |
| Deviation in length & width    | (+-0.5%)                                      | (+-0.3%)      | ISO- 10545- 2           |
| Deviation in thickness         | (+-5.0%)                                      | (+-4.0%)      | ISO- 10545- 2           |
| Straightness in side           | (+-0.5%)                                      | (+-0.1%)      | ISO- 10545- 2           |
| Rectangularity                 | (+-0.5%)                                      | (+-0.1%)      | ISO- 10545- 2           |
| Surface flatness               | (+-0.5%)                                      | (+-0.2%)      | ISO- 10545- 2           |
| Glossiness                     | MIN 90%                                       | Pass          | Glossometer             |
| STRUCTURAL PROPERTIES          |                                               |               |                         |
| Water absorption               | <0.50%                                        | <0.05%        | ISO- 10545- 3           |
| MESSIVE MECHANICAL PROPERTIES  |                                               |               |                         |
| Modulus of repture             | MIN. 35N/mm2                                  | MIN. 35N/mm2  | ISO- 10545- 4           |
| Breaking strength              | MIN. 1300N                                    | MIN. 2000N    | ISO- 10545- 4           |
| Impact resistance              | As per mfg.                                   | MIN. 0.55     | ISO- 10545- 5           |
| SURFACE MECHANICAL PROPERTIES  |                                               |               |                         |
| Surface abrasion Resistance    | MIN. class -2                                 | MIN. Class -3 | ISO- 10545- 7           |
| Moh's hardness                 | MIN. 5                                        | MIN. 6        | En101                   |
| CHEMICAL PROPERTIES            |                                               |               |                         |
| Frost Resistance               | Required                                      | Pass          | ISO- 10545- 12          |
| Household chemicals Resistance | MIN. class AA                                 | Pass          | ISO- 10545- 13          |
| Stain Resistance               | Resistant                                     | Resistant     | ISO- 10545- 14          |
| THERMAL PROPERTIES             |                                               |               |                         |
| Thermal shock Resistance       | 10 Cycle                                      | Pass          | ISO- 10545- 9           |
| Thermal expansion (COE)        | MAX.9.0x10.6                                  | MAX.6.5x10.6  | ISO- 10545- 8           |
| Moisture expantion             | Nill                                          | Nill          | ISO- 10545- 10          |
| PHYSICAL PROPERTIES            |                                               |               |                         |
| Box Weight                     | 10.8kg                                        | Per / 1Box    | -                       |
| Tile Thickness                 | 7.5mm                                         | Per / 1pc     | -                       |





**VEGANTA**  
C E R A M I C



## VEGANTA CERAMIC

---

📍 Plot no. 8to10 and 15to17 Survey No. 50  
Paiki Office no. 118 First Floor IBC,  
8-A National Highway Morbi-363642, Gujarat.

🌐 [www.vegantaceramic.com](http://www.vegantaceramic.com)

✉ [vegantaceramic@gmail.com](mailto:vegantaceramic@gmail.com)

☎ +91 96544 03497

☎ +91 95861 44468